

## **L-613-S AUTOMATIC TRANSMISSION FLUID**

Revised 10-1-09

Page 1 of 2

### **DESCRIPTION**

L-613-S Automatic Transmission Fluid is a premium fluid designed for automatic transmissions of all North American, European and Asia-Pacific made vehicles. L-613-S Automatic Transmission Fluid provides exceptional oxidation, wear, frictional stability and anti-shudder properties required in today's high performance transmissions. It is also designed to deliver premium performance in older transmissions.

### **APPLICATIONS**


L-613-S Automatic Transmission Fluid meets or exceeds requirements of Ford's Mercon V and will perform in Mercon SP, Dexron VI and Toyota WS applications. It is suitable for Chrysler vehicles where ATF+4 and ATF+3 are required and can also be used where fluids meeting Ford ESP-M2C138CJ or Ford M2C166-H specifications are required. L-613-S Automatic Transmission Fluid is also recommended for Mercedes transmissions. It exceeds Allison C4 specifications.

**Not recommended for use where Ford Type F fluid is required.**

#### Detailed list of recommended specifications below:

<b>ACURA</b>	ATF/Z1 (Except in CVT's)
<b>ALLISON</b>	C-4
<b>AUDI</b>	G-055-025-A2
<b>BMW</b>	LA2634, LT7114, Texaco ETL 7045-E, ETL-8027B, Shell M1375 4
<b>CHRYSLER</b>	ATF+4, ATF+3, ATF+2, ATF+
<b>FORD</b>	Mercon SP, Mercon LV, Mercon V, Mercon, XT-9QMM5
<b>GENERAL MOTORS</b>	Dexron VI, Dexron V, Dexron III, 9986195, Type A, Suffix A(TASA)
<b>HONDA</b>	ATF-Z1 (Except in CVT's)
<b>HYUNDAI</b>	SP-II, SP-III
<b>IDEMITSU</b>	K17
<b>INFINITY</b>	Matic-D, Matic-J, Matic-K
<b>ISUZU</b>	Genuine
<b>JAGUAR</b>	Shell M1375-4
<b>KIA</b>	All Specifications
<b>LAND ROVER</b>	Texaco N402, Shell M1375-4
<b>LEXUS</b>	Type T, T-III, T-IV
<b>MAN</b>	339F
<b>MAZDA</b>	ATF-MV
<b>MERCEDES BENZ</b>	SHEET 236x
<b>MINI</b>	Diamond SP-II, SP-III
<b>NISSAN</b>	Matic-D, Matic-J, Matic-K
<b>SAAB</b>	Transmax J
<b>SUBARU</b>	All Specifications

**For Product Information Sheets and Material Safety Data Sheets,  
 Please visit our website: [BatonRougeIndustries.com](http://BatonRougeIndustries.com)**

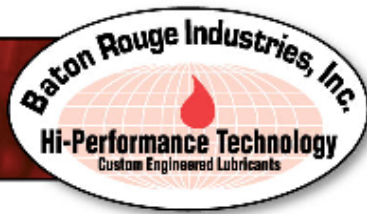

## L-613-S AUTOMATIC TRANSMISSION FLUID

Revised 10-1-09

Page 2 of 2

<b>TOYOTA</b>	<b>Type T, T-III, T-IV</b>
<b>VOITH</b>	<b>55-6335-32 (G607)</b>
<b>VOLVO</b>	<b>All Specifications</b>
<b>VOLKSWAGON</b>	<b>TL52162, G052-990</b>
<b>ZF</b>	<b>TE-ML 03D, 04D, 14A, 14B, 16L, 17C</b>
<b>VARIOUS (AISIN-WARNER TRANSMISSIONS)</b>	<b>JWS-3309</b>

Typical test data are average values only. Minor variations which do not affect product performance are to be expected in normal manufacturing.

### HAZARDS

Contains Petroleum Distillates. Use with adequate ventilation. Keep away from heat, flame and all other sources of ignition. Avoid prolonged contact with skin. In case of contact wash thoroughly with soap and water. Do not take internally. If swallowed, do not induce vomiting. Call Physician or Poison Control Center immediately. Keep out of reach of children.

<u>SPECIFICATIONS</u>	
Specific Gravity @ 60° F.	.86-.88
Viscosity @ 100 °C, cSt	7.6
Brookfield Viscosity, cP, Max.	13,000
Flash point, °F	330
Pour Point, °F	-45
Color	RED