


## Product Information

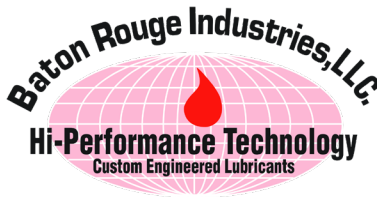

Baton Rouge Industries, LLC  
5319 Groom Rd · P.O. Box 26  
Baker, Louisiana 70714  
1-800-232-0334 · 225-775-3362  
Fax: 225-775-3498  
[BatonRougeIndustries.com](http://BatonRougeIndustries.com)

### L-615-XL

## Multi VIS Power-Fluid – Extra Life J20C

01/01/25

(Multi VIS Universal Hydraulic / Transmission Fluid) (SAE 10W30)

### Description

**Multi VIS L-615-XL Power –Fluid – Extra Life J20C** is formulated specially for use in transmissions, final drives, wet brakes, and hydraulic systems of tractors and other equipment which employs a common fluid reservoir.

**Multi VIS L-615-XL Power –Fluid – Extra Life J20C** is manufactured with the highest quality base stocks, a viscosity index improver, oxidation and corrosion inhibitors, anti-wear and film strength additives, an antifoaming agent, and a pour point depressant.

### Features/Benefits

- Meets the needs of modern tractors for a combination lubricant
- Performs many functions such as lubrication of the transmission and final drive
- Serving as hydraulic fluid for the operation of power steering units, brakes and implements
- Eliminates “chatter” and excessive brake facing wear, assuring smooth operation of clutch packs and wet brakes.
- Protects metal surfaces against scuffing and wear.
- Compatible with equipment manufacturer’s proprietary fluids and other fluids of this type.

### Application

**Multi VIS L-615-XL Power –Fluid – Extra Life J20C** is formulated specifically to meet John Deere J20C specifications. It is recommended for use as a multi-functional fluid in all type of farm equipment and tractors. **Meets Performance**

### **Requirements:**

- AGCO – improved power fluid 821XL, Power Fluid 821
- API GL-4 (not recommended for hypoid gear oil applications)
- John Deere – J20C, Quatrol®, Hy-gard®
- John Deer 303
- Ford New Holland – ESN-M2C134-D, FNHA-2-C-201
- Massey Ferguson – M1135, M1141, M1143, M1145
- HTF 272843, 257541, 246634
- White Farm Equipment – Q-1826
- Case Corporation – JIC-143, JIC-145, MS 1206, MS 1207, MS 1209, MS 1210
- Oliver – Type 55
- Caterpillar – TO-2
- Renk Doromat - 873, 874 A/B
- Allison C-4
- Kubota UDT
- Komatsu Dresser
- Versatile Specification 23M or 24M

- International Harvester B6
- Volvo – VME, WB 101
- Fiat-Hesson Multi-G
- ZF TE-ML-03E
- And many others...

® - Quatrol and Hy-gard are registered trademarks of John Deere and not a specification. XLTractor Hydraulic Fluid may be used where Quatrol or Hy-gard is called for.

<b>Specifications</b>	<b>Results</b>
Specific Gravity @ 60 °F	0.8690
Viscosity, Kinematic cSt at 40°C cSt at 100°C	55 9.4
Viscosity Index	154
Viscosity, Brookfield cP at -34.4°C Max	70,000
Flash Point, °F	403
Pour Point, °C (°F)	-35 (-31)
Color	1.5