


## Product Information

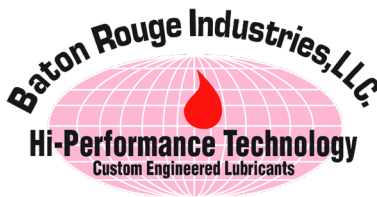

Baton Rouge Industries, LLC  
5319 Groom Rd · P.O. Box 26  
Baker, Louisiana 70714  
1-800-232-0334 · 225-775-3362  
Fax: 225-775-3498  
[BatonRougeIndustries.com](http://BatonRougeIndustries.com)

# **L-625 85W140** **Power Gear E.P. Gear Lubricant**

01/01/25

Red dye added for leak traceability

### Description

**L-625 Power Gear E.P. Gear Lubricant** is a premium quality multi-purpose climbing gear lubricant which provides superior performance that is obtained using quality base oils and a select extreme pressure additive system. These additives impart anti-weld, anti-scuff and anti-wear properties that are necessary in heavy duty service gear lubricants.

**L-625 Power Gear E.P. Gear Lubricant** provides excellent protection under the most severe conditions encountered in commercial transmissions, axles and final drives.

**L-625 Power Gear E.P. Gear Lubricant** is designed to be used in limited slip differentials.

### Features/Benefits

- Climbing gear lube due to added tackifier
- Does Not Mix with Water
- 300,000-mile drain interval
- Excellent product for use in heavy equipment applications which place higher performance demands on the drive train lubricants
- For use in limited slip differentials
- Exceptional reliability in today's drive train applications as well as in the older models
- Provides high thermal stability as well as oxidation resistance
- Protects against low speed/ high torque wear
- Excellent fluidity in low temperatures which reduces wear during start up
- Improved lubrication and extended seal life due to good foam control
- Better lubrication under cold start-ups

### Application

**L-625 Power Gear E.P. Gear Lubricant** is recommended for all on-highway heavy and light duty trucks, vans and buses requiring API GL-5 and/or MT-1 type fluids. **L-625 Power Gear E.P. Gear Lubricant** is also recommended for off-highway applications such as construction, mining, agriculture, and quarrying which require these type fluids. **L-625 Power Gear E.P. Gear Lubricant** is intended for use in limited slip applications as well.

### Meets Performance Requirements

AGMA 250.04 AGMA 9005-E02 AIST 224

API GL-4 API GL-5 API MT-1

Arvin Meritor axles

Arvin Meritor 0-76-A/B/D/M/N/Q Cincinnati Milacron

DAF (GL-5 axle lubricants) David Brown S1.53.101(E)

DIN 51517, Part 3

Eaton

Ford WSP-M2C197-A IVECO (J-2360) KOMATSU

KES 07.861 MACK GO-J MAN 341 Z-1 MAN

M 3343 Type M

MB 235.0, 235.1, 235.5, 235.6, 235.8 MIL-PRF-2105D

MIL-PRF-2105E

PG-2 Limited Slip Mercedes Benz

235.20 NATO O-226 Renault (GL-5) SAE J-2360

Scania: STO 1:0, 2:0A

U.S. Steel 224 Volvo 97310

Volvo 1273.10

ZF TE-ML 02A/B, 05A/B/C4, 07A, 08, 12A/B/C4/E,

16A/B/C/D/E4/F, 17A/B,

19A/B/C, 21A/B

MAN 342 Type M1, M2, M3

<b>Specifications</b>	<b>SAE Grade</b>	<b>GL-5 85W140</b>
Specific Gravity @ 60 °F		0.8925
Viscosity, Kinematic cSt at 40°C		367.2
cSt at 100°C		27.44
Viscosity Index		101
Viscosity, Brookfield cP at -12°C Max		150,000
Flash Point, °F		415
Pour Point, °C (°F)		-15 (5)
Color		Red